



Product Performance Summary Sheet

AWS 90 BS.SI+ Inward Opening Windows

AWS 90 BS.SI+ small vent

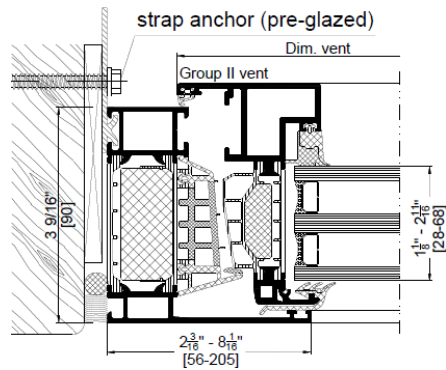

AWS 90 BS.SI+ medium vent

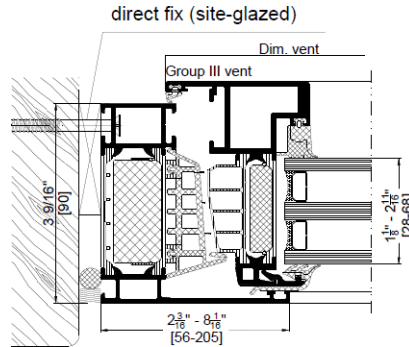


Concealed Hardware



Performance Overview

Variants

Turn-tilt, tilt-turn side hung casement, hopper



Minimum Vent Dimensions

18-1/2" x 21-1/4" (470 mm x 540 mm) (300 stay)
22-7/16" x 30-11/16" (570 mm x 780 mm) (400 stay)

Maximum Vent Dimensions

Tilt-turn & Casement

39-3/8" x 86-5/8" (1000 mm x 2200 mm)
59-1/16" x 78-3/4" (1500 mm x 2000 mm)

Hopper

86-5/8" x 39-3/8" (2200 mm x 1000 mm)

Maximum Weight

Standard with stay 300
Standard with stay 400

287 lb. (130 kg)
353 lb. (160 kg)

Water Penetration

15psf (720 Pa)

Air Infiltration

<0.1 cfm/ft²

AAMA Rating

AW-PG 70

Hardware

Concealed AvanTec SimplySmart, 180° opening possible
The clip-on technology allows for the corner pivot, stay and corner drive to be installed without the use of tools. In addition, the locking bars can be clipped on in any sequence.

Accessories

General window restrictor, New York City specific window restrictor, ADA operable force handle, SmartActive antimicrobial lockable/ non-lockable handle, roller catch, nighttime ventilation

Note: Above mentioned information and data depending to specific system configurations.
Please find detailed information in our technical documentations or contact a Skyline Windows Representative