



## Schüco USA - Product Performance Summary Sheet

### AD UP 90.SI Inward Opening Entrance Door


AD UP 90 Jamb

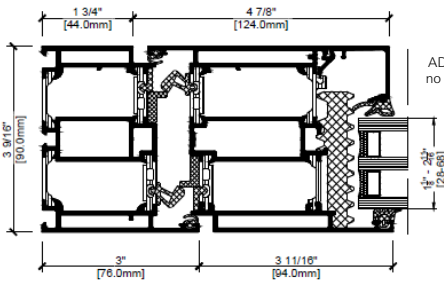


AD UP 90.SI Jamb

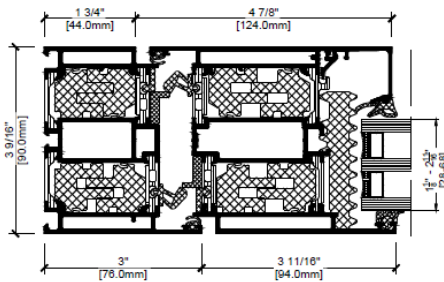

AD UP 90.SI Sill

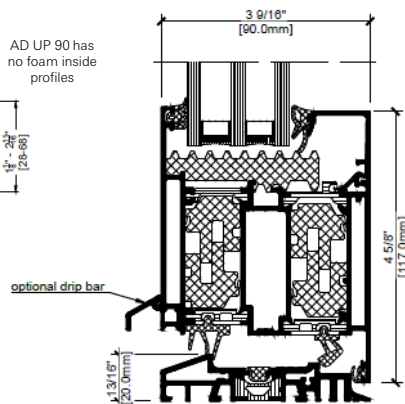

AD UP 90.SI Panel Door

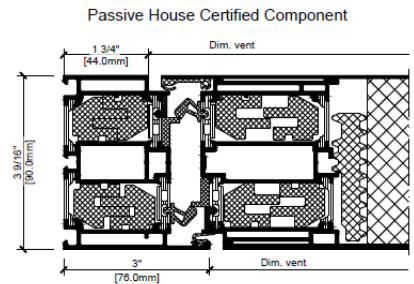

#### Performance Overview

##### Variants

Single, Single with fixed lite(s)



##### Maximum Weight Dimensions (Single Door)

55-1/8" x 118-1/8" (1400 mm x 3000 mm)

##### Vent Weight

Up to 441 lb. (200 kg), depending on vent size

##### Water Penetration (Single Door)

2.92 psf (140 Pa), without a drip bar  
4.59 psf (220 Pa), with drip bar

##### AAMA Rating (Single Door)

CW-PG 30

##### Hardware

Exposed barrel hinge, single point locking, multiple point locking, door pulls

##### Accessories

Door closer, 10" bottom rail, door stop

##### Thermal Example\*

| Glass U-Value | Spacer Type     | Overall U-Value |
|---------------|-----------------|-----------------|
| 0.29          | TGI-M warm edge | 0.29            |
| 0.24          | TGI-M warm edge | 0.26            |
| 0.16          | TGI-M warm edge | 0.21            |
| 0.10          | TGI-M warm edge | 0.18            |

\*Information based on NFRC standard test size for entrance door (37-13/16" x 82-5/16" [960 mm x 2090 mm])

Note: Above mentioned information and data depending to specific system configurations.  
Please find detailed information in our technical documentations or contact a Schüco USA Technician