



Bigfoot Door - Product Performance Summary Sheet

ASS 50 Lift-and-Slide Sliding Door


ASE 50 Head

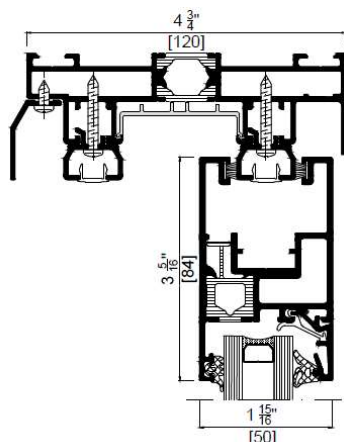

ASS 50 Sill

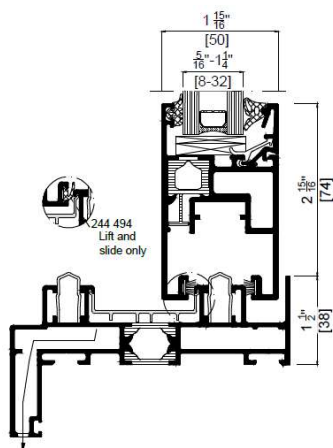

ASS 50 ADA Threshold

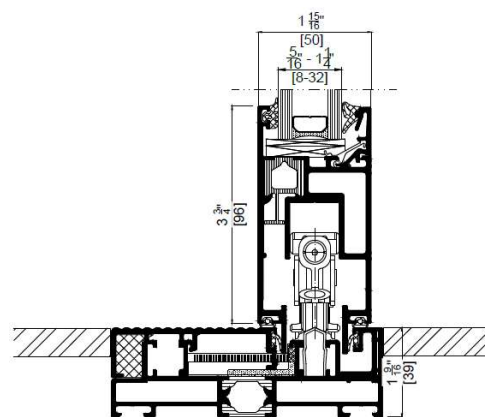


Performance Overview


Variants

Single, double and triple track design

Double Track

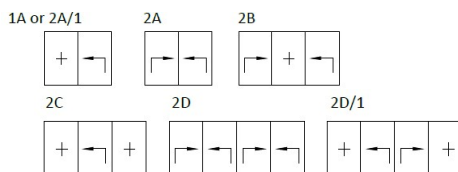

Triple Track



Maximum Vent Dimensions

Up to 118-1/8" x 118-1/8" (3000 mm x 3000 mm), depending on wind load, internal and external reinforcement possible

Vent Weight

Up to 882 lb. (400 kg)

Water Penetration

10 psf (480 Pa) Type 1A/1 (XO) with deep threshold and lift-and-slide hardware

ADA Threshold

8 psf (383 Pa) Typw 2A/1 (XO) with deep threshold and lift-and-slide hardware
5.4 psf (259 Pa) Type 3E/1 (XO) with deep threshold and lift-and-slide hardware

AAMA Rating ADA Threshold

AW-PG 50: Single Track (XO)
AW-PG 35: Double Track (XO)

Hardware

Sliding, Lift-and-Slide

Thermal Example*

Glass U-Value	Spacer Type	Overall U-Value
0.29	Aluminum	0.49
0.29	Stainless Steel	0.48
0.29	TGI-M warm edge	0.47
0.24	Stainless Steel	0.45
0.24	TGI-M warm edge	0.44

*Information based on NFRC standard test size for sliding door (78-3/4" x 78-3/4" [2000 mm x 2000 mm])

Note: Above mentioned information and data depending to specific system configurations.
Please find detailed information in our technical documentations or contact Bigfoot Door directly.

SCHÜCO