



### ASS 77 PD.HI Manual Panorama Sliding Door


ASS 77 PD.HI Head

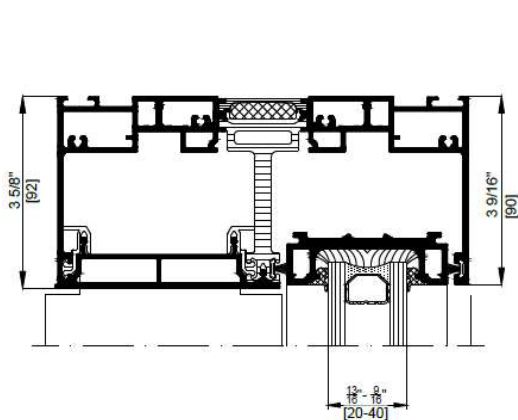

ASS 77 PD.HI Jamb

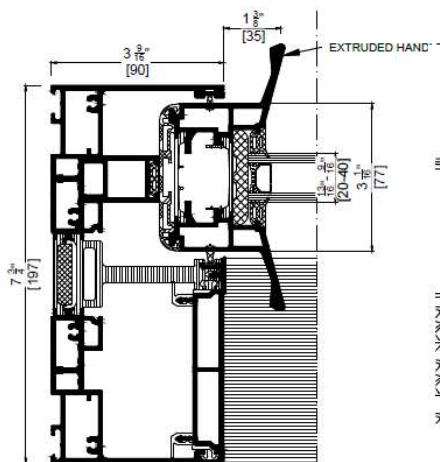


ASS 77 PD.HI Sill

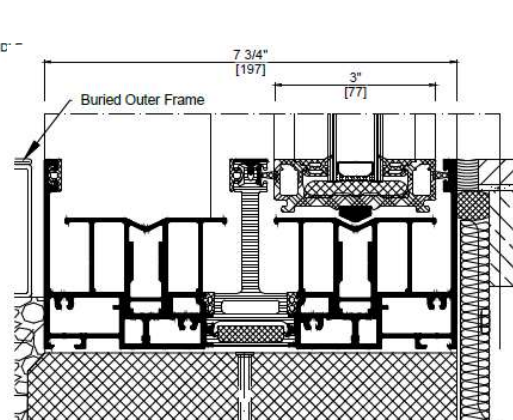

#### Performance Overview

##### Variants

Double track panorama design with buried outer frame on all four sides to provide maximum transparency

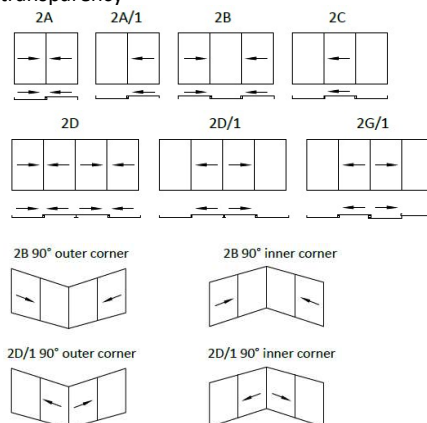

##### Maximum Vent Dimensions

Up to 126" x 118-1/8" (3200 mm x 3000 mm), depending on wind load  
Internal and external reinforcement possible

##### Glass Thickness

Extruded pull grip handle: 13/16" – 1-9/16" (20 mm – 40 mm)  
Pull handle: 13/16" – 1-15/16" (20 mm – 50 mm)

##### Maximum Vent Weight

Up to 1100 lb. (500 kg)

##### Water Penetration

8 psf (383 Pa), Double Track: Type 2A (XX), Type 2A/1 (XO)

##### AAMA Rating

CW-PG 40, Double Track: Type 2A (XX), Type 2A/1 (XO)

##### Thermal Example\*

| Glass U-Value | Spacer Type     | Overall U-Value |
|---------------|-----------------|-----------------|
| 0.29          | Aluminum        | 0.39            |
| 0.29          | Stainless Steel | 0.38            |
| 0.29          | TGI-M warm edge | 0.38            |
| 0.24          | Stainless Steel | 0.35            |
| 0.24          | TGI-M warm edge | 0.34            |
| 0.16          | TGI-M warm edge | 0.27            |
| 0.16          | TGI-M warm edge | 0.23            |

\*Information based on NFRC standard test size for sliding door (78-3/4" x 78-3/4" [2000 mm x 2000 mm])

Note: Above mentioned information and data depending to specific system configurations.  
Please find detailed information in our technical documentations or contact Bigfoot Door directly.