



AWS 114 Motorized TipTronic SimplySmart Windows


AWS 114 TipTronic

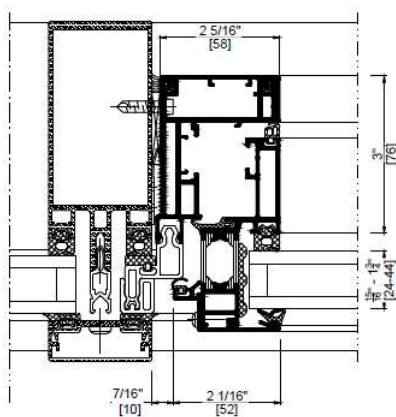

AWS 114 SG TipTronic

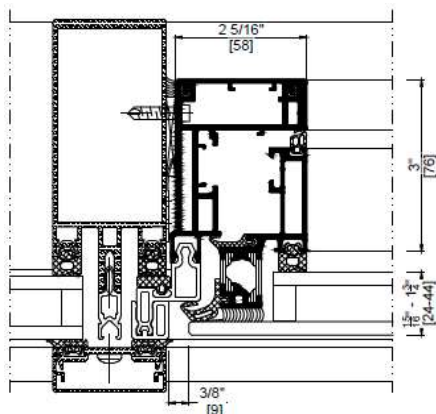


AWS 114 SG.SI TipTronic

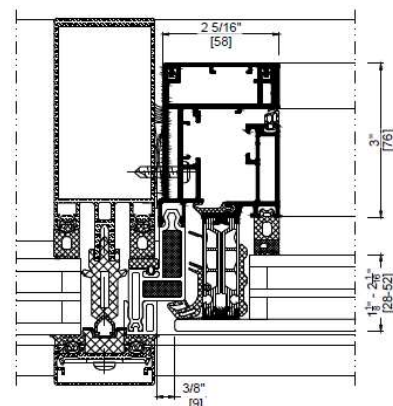

Performance Overview

Variants

Projected top hung awning, parallel-opening



Minimum Vent Dimensions

Awning

21-1/16" x 17-11/16" (535 x 450 mm)

Parallel-Opening

22-1/16" x 43-7/8" (560 x 1115 mm)
38-3/16" x 23-1/16" (970 x 585 mm)

Maximum Vent Dimensions

Awning

59-1/16" x 141-3/4" (1500 x 3600mm)
106-5/16" x 98-7/16" (2700 x 2500 mm)

Parallel-Opening

51-3/16" x 141-3/4" (1300 x 3600 mm)
86-5/8" x 98-7/16" (2200 x 2500 mm)

Maximum Weight

Awning

551 lb. (250 kg)

Parallel-Opening

441 lb. (200 kg)

Water Penetration

15psf (720 Pa)

AAMA Rating

Awning

CW-PG 40

Parallel-Opening

AW-PG 40

Hardware

UL rated concealed locking motors and chain actuators

Accessories

Variable chain length openings for top hung awning (7-1/16" – 23-5/8" [180-600 mm]), New York City window restrictor, mesh window security rollers for parallel opening, compatible with sensors (wind, temperature, rain, VOC air quality and motion)

Note: Above mentioned information and data depending to specific system configurations.
Please find detailed information in our technical documentations or contact Bigfoot Door directly.