



Schüco USA - Product Performance Summary Sheet

Impact Resistant Fixed Windows - Dry Glazed


AWS 65




AWS 70.HI




AWS 75.SI+

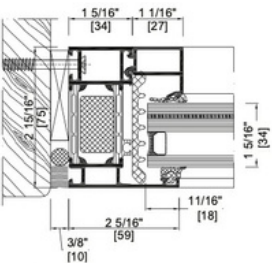

AWS 90.SI+

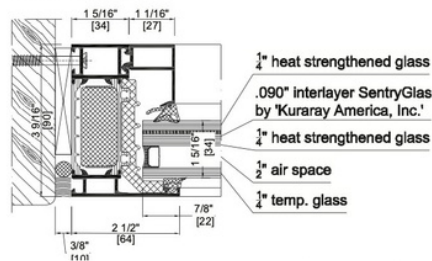

AWS 65 Sill Details

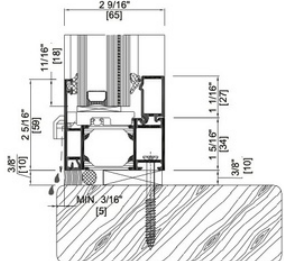

Performance Overview		
Variants	Fixed 	
Minimum Overall Dimensions	44-3/16" x 68-3/16" (1122 mm x 1829 mm) 68-3/16" x 44-3/16" (1829 mm x 1122 mm)	
Water Penetration	15 psf (720 Pa)	
AAMA Rating	AW-PG 70	
Hurricane Impact Rating	+/-70 psf for large and small missile	
Fastener Option	Schüco strap anchor 207628* or direct fix**, both with Ultracon 1/4" trim fit screws, locations and embedment according to approval drawings	
Thermal Example	AWS 65 Overall U-Value Overall SHGC Value	0.33 Btu/hr-ft2/-°F 0.23

Information based on NFRC standard test size for fixed window (47-1/4" x 59" (1200 mm x 1500 mm)) with a TGI wave spacer. IGU U-Value 0.28

Note: Above mentioned information and data depending to specific system configurations. Please find detailed information in our technical documentations or contact a Schüco USA Technician