



## Schüco USA - Product Performance Summary Sheet

### Impact Resistant Fix Windows - Wet Glazed


AWS 65




AWS 70.HI




AWS 75.SI+

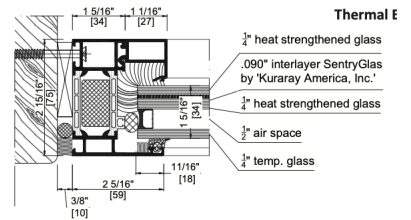


AWS 65 - Structural Mullion

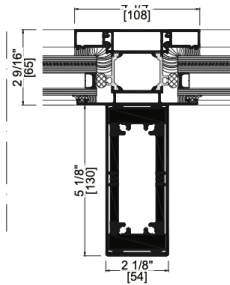

AWS 65 Couplin Mullion

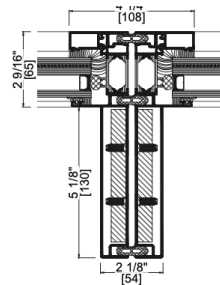

AWS 65 Coupling Mullion Sill

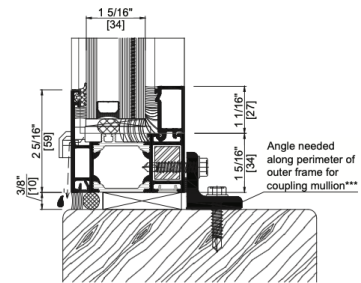

#### Performance Overview

|                            |                                                                                                                                                                                                                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Variants                   | Fixed with two different mullion options, two different transom options and operable options<br>                                                                                               |
| Minimum Overall Dimensions | Structural Mullion Panel: 54" x 144" (1372 mm x 3658 mm)<br>Coupling Mullion Panel: 60" x 144" (1524 mm x 3658 mm)                                                                                                                                                                |
| Water Penetration          | 12 psf (580 Pa)                                                                                                                                                                                                                                                                   |
| AAMA Rating                | AW-PG 60                                                                                                                                                                                                                                                                          |
| Hurricane Impact Rating    | +/-65 psf for large and small missile                                                                                                                                                                                                                                             |
| Fastener Option            | Schüco strap anchor 207628* or direct fix**, for punched opening or structural mullion. Use direct fix with aluminum angle*** around the perimeter of outer frame for coupling mullion. Fastener type, locations and embedment according to Florida approval drawings (FL #29717) |
| Thermal Example            | AWS 65<br>Overall U-Value: 0.33 Btu/hr-ft <sup>2</sup> -°F<br>Overall SHGC Value = 0.23                                                                                                                                                                                           |

Information based on NFRC standard test size for fixed window (47-1/4" x 59" (1200 mm x 1500 mm)) with a stainless steel spacer. IGU U-Value 0.28 with Solarban 70 on #2.

Note: Above mentioned information and data depending to specific system configurations. Please find detailed information in our technical documentations or contact a Schüco USA Technician