



Bigfoot Door - Product Performance Summary Sheet

AWS 65 BS Inward Opening Windows

AWS 65 BS small vent

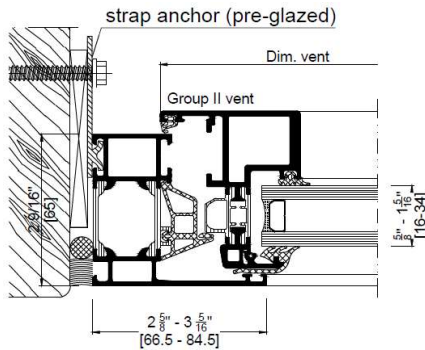

AWS 65 BS medium vent

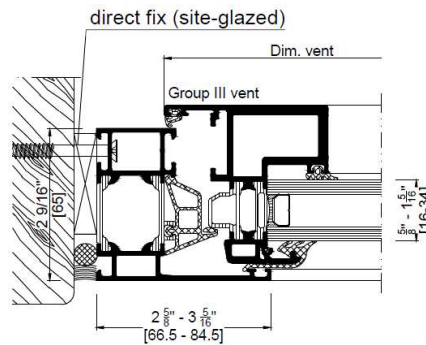


Concealed Hardware



Performance Overview

Variants

Turn-tilt, tilt-turn, side hung casement, hopper



Minimum Vent Dimensions

18-1/2" x 21-1/4" (470 x 540 mm) (300 stay)
22-7/16" x 30-11/16" (570 x 780 mm) (400 stay)

Maximum Vent Dimensions

Tilt-turn & Casement

39-3/8" x 86-5/8" (1000 x 2200 mm)
59-1/16" x 78-3/4" (1500 x 2000 mm)

Hopper

86-5/8" x 39-3/8" (2200 x 1000 mm)

Maximum Weight

Standard with stay 300

287 lb. (130 kg)

Standard with stay 400

353 lb. (160 kg)

Water Penetration

15psf (720 Pa)

Air Infiltration/ Exfiltration

<0.10 cfm/ft²

AAMA Rating

AW-PG 70

Hardware SimplySmart

Concealed Avantec SimplySmart, 180° opening possible

The clip-on technology allows for the corner pivot, stay and corner drive to be installed without the use of tools. In addition, the locking bars can be clipped on in any sequence.

Accessories

Continuous center gasket simplified installation process without the need of gasket corners and corner chevrons which reduces fabrication time. General window restrictor, New York City window restrictor, ADA operable force handle, SmartActive antimicrobial lockable/ non-lockable handle, roller catch, night time ventilation

Thermal Example*

Glass U-Value

0.29

0.29

0.24

Spacer Type

Aluminum

TGI-M warm edge

TGI-M warm edge

Overall U-Value

0.39

0.37

0.34

*Information based on NFRC standard test size for tilt-turn window (47-1/4" x 59" [1200 mm x 1500 mm])

Note: Above mentioned information and data depending to specific system configurations.
Please find detailed information in our technical documentations or contact Bigfoot Door directly.