
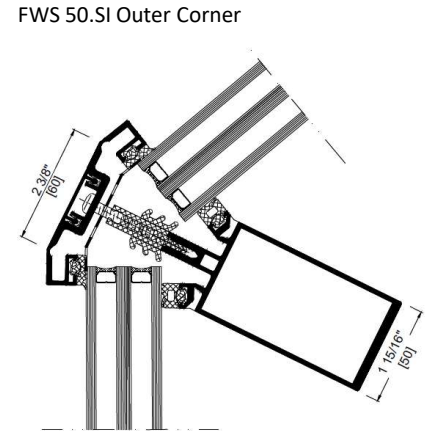
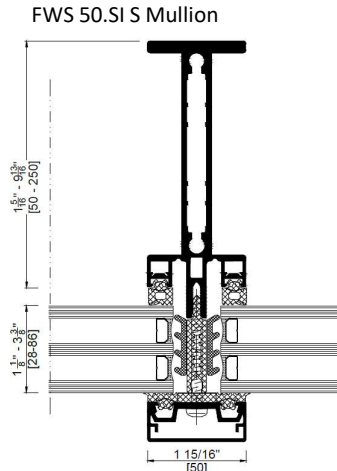


## Bigfoot Door - Product Performance Summary Sheet


### FWS 50.SI Captured Stick Curtain Wall

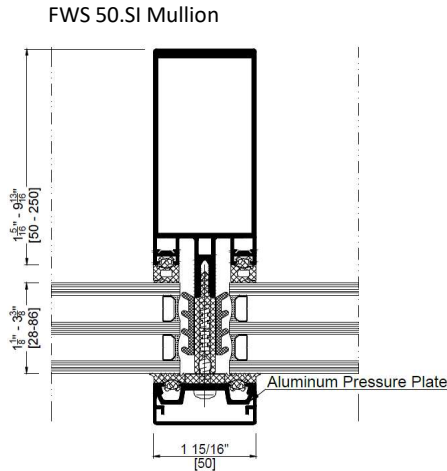

#### Performance Overview


##### Variants

Vertical, Skylight, Segmented Stick Curtain Wall



##### Profile Variants

FWS 50 S (Steel Contour Look)



Article#

322540,322550,323870

322560,322570

##### Minimum Vent Dimensions

Depends on wind loads and mullion depths

##### Maximum Glass Weight

2381 lb. (1080 kg)

##### Water Penetration

15 psf (720 Pa)

##### Air-Infiltration/ Exfiltration

0.01 cfm/ft<sup>2</sup> (<0.1 L/s/m<sup>2</sup>)

##### Thermal Example\*

###### Glass U-Value

0.29  
0.29  
0.29  
0.24  
0.16  
0.10

###### Spacer Type

Aluminum  
Stainless Steel  
TGI-M Warm Edge  
TGI-M Warm Edge  
TGI-M Warm Edge  
TGI-M Warm Edge

###### Overall U-Value

0.39  
0.37  
0.36  
0.32  
0.24  
0.18

\*Information based on NFRC standard test size for curtain wall 78-3/4" x 78-3/4" (2000 mm x 2000 mm).

Note: Above mentioned information and data depending to specific system configurations.  
Please find detailed information in our technical documentations or contact Bigfoot Door directly.

# SCHÜCO