



FWS 50 Captured Stick Curtain Wall

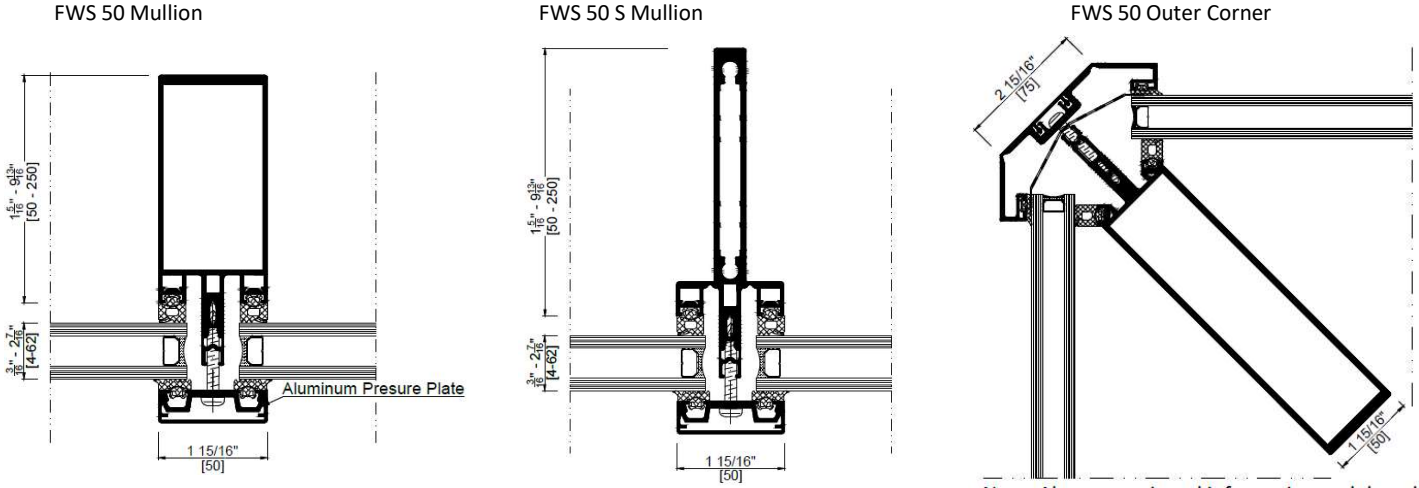

Performance Overview


Variants

Vertical, Skylight, Segmented Stick Curtain Wall



Profile Variants

FWS 50 S (Steel Contour Look)



Article#

322540,322550,323870

322560,322570

Minimum Vent Dimensions

Depends on wind loads and mullion depths

Maximum Glass Weight

2381 lb. (1080 kg)

Water Penetration

15 psf (720 Pa)

Air-Infiltration/ Exfiltration

0.01 cfm/ft2 (<0.1 L/s/m2)

Thermal Example*

Glass U-Value

0.29

0.29

0.29

0.24

0.16

0.10

Spacer Type

Aluminum

Stainless Steel

TGI-M Warm Edge

TGI-M Warm Edge

TGI-M Warm Edge

TGI-M Warm Edge

Overall U-Value

0.40

0.38

0.37

0.33

0.25

0.19

*Information based on NFRC standard test size for curtain wall 78-3/4" x 78-3/4" (2000 mm x 2000 mm).

Note: Above mentioned information and data depending to specific system configurations.
Please find detailed information in our technical documentations or contact Bigfoot Door directly.

SCHÜCO