



FWS 60 SG Captured Stick Curtain Wall


FWS 60 SG – Wet sealed

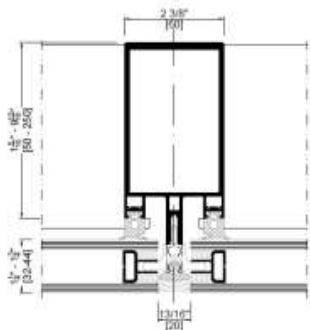


FWS 60 SG – U-shaped gasket

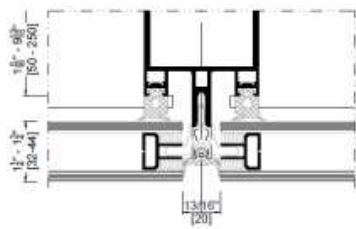

FWS 60 SG – Flush gasket




FWS 60 SG.SI – Wet sealed



Performance Overview


Variants

Vertical, Skylight, Segmented Stick Curtain Wall



Profile Variants

FWS 60 SG Custom (1" IGU)



Dimensions

Depending on requirements

Maximum Glass Weight

Up to 1650 lb. (750 kg), depending on glass support

Water Penetration

15 psf (720 Pa)

Thermal Example*	System	Type	Glass U-Value	Spacer Type	Overall U-Value
	FWS 60 SG	Wet seal/ flush gasket	0.29	Plastic pocket	0.39
			0.24		0.34
	FWS 60 SG	U-shaped	0.29	Plastic pocket	0.41
			0.24		0.37
	FWS 60 SG.SI	Wet seal	0.16	Plastic pocket	0.27
			0.10		0.22

*Information based on NFRC standard test size for curtain wall 78-3/4" x 78-3/4" (2000 mm x 2000 mm).

Note: Above mentioned information and data depending to specific system configurations.
Please find detailed information in our technical documentations or contact Bigfoot Door directly.