



FWS 60 Captured Stick Curtain Wall


FWS 60 Mullion

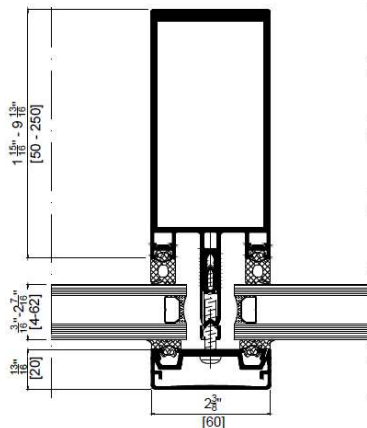

FWS 60 Transom

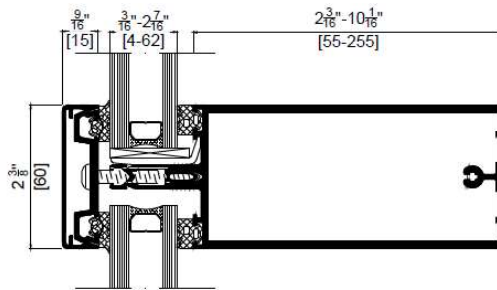


FWS 60 Corner Mullion

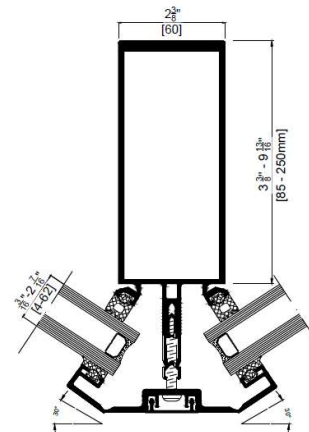

Performance Overview

Variants

Vertical, Skylight, Segmented Stick Curtain Wall



Minimum Vent Dimensions

Depends on wind loads and mullion depths

Maximum Glass Weight

2381 lb. (1080 kg)

Water Penetration

15 psf (720 Pa)

Air-Infiltration/ Exfiltration

0.01 cfm/ft2(<0.1 L/s/m2)

Thermal Example*

Glass U-Value	Spacer Type	Overall U-Value
0.29	Aluminum	0.39
0.29	Stainless Steel	0.37
0.29	TGI-M Warm Edge	0.36
0.24	TGI-M Warm Edge	0.32
0.16	TGI-M Warm Edge	0.24
0.10	TGI-M Warm Edge	0.19

*Information based on NFRC standard test size for curtain wall 78-3/4" x 78-3/4" (2000 mm x 2000 mm).

Note: Above mentioned information and data depending to specific system configurations.

Please find detailed information in our technical documentations or contact Bigfoot Door directly.

www.bigfootdoor.com | info@bigfootdoor.com

Rev. 03-2026