



Schüco USA - Product Performance Summary Sheet

Impact Resistant Outward Opening Casement Windows


AWS 65 jamb




AWS 70.HI jamb

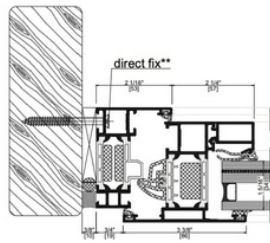


AWS 75.SI jamb

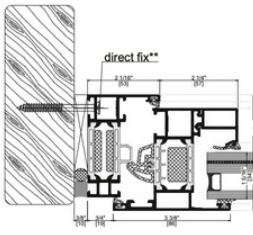

AWS 65 fixed and casement

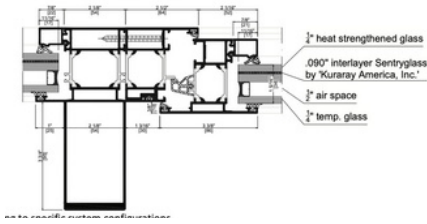

Performance Overview		
Variants	Side hung casement 	
Minimum Vent Dimensions Maximum Dimensions	17-11/16" x 17-11/16" (450 mm x 450 mm) 3' 9-5/8" x 7' (1159 mm x 2134 mm)	
Maximum Weight	Up to 287 lb. (130 kg)	
Water Penetration	15 psf (720 Pa)	
AAMA Rating	AW-PG 70 (single terrace door)	
Hurricane Impact Rating	+/-70 psf for large and small missile	
Hardware	Concealed hinges	
Accessories	Limiting restrictor	
Fastener Option	Schüco strap anchor 207628* or direct fix**, both with Ultracon 1/4" trim fit screws, locations and embedment according to approval drawings	
Thermal Example	AWS 65 Overall U-Value Overall SHGC Value	0.39 Btu/hr-ft2/-°F 0.16

Information based on NFRC test size (23-5/8" x 59-1/16" (600 mm x 1500 mm)) with an stainless steel spacer. IGU U-Value 0.28.

Note: Above mentioned information and data depending to specific system configurations. Please find detailed information in our technical documentations or contact a Schüco USA Technician