



Bigfoot Door - Product Performance Summary Sheet

AWS 70.HI Outward Opening Terrace Door with ADA Threshold


AWS 70.HI large vent

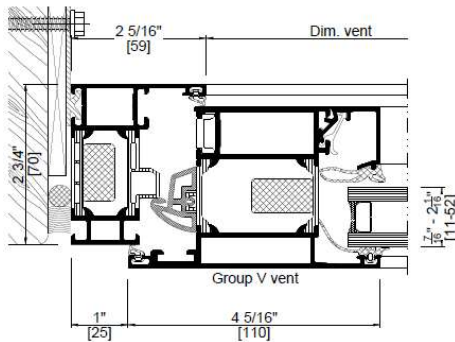


AWS 70.HI ADA threshold

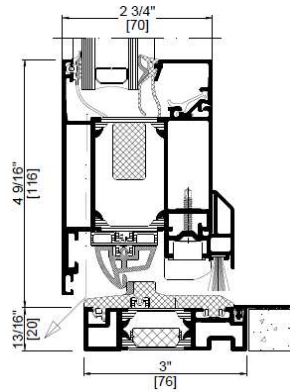

AWS 70.HI 10" Bottom Rail

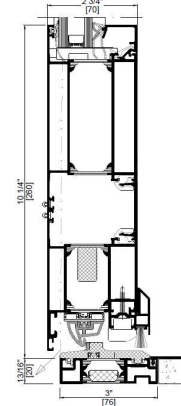


AWS 70.HI meeting stile

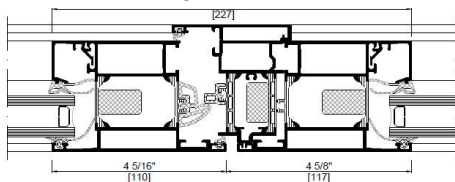

Performance Overview

Variants

Singe, Double Terrace Door



Maximum Vent Dimensions

Single	43-5/16" x 119-3/16" (1100 x 3023 mm)
Double	37-3/8" x 119-3/16" (950 x 3023 mm)

Vent Weight	Up to 287 lb. (130 kg)
-------------	------------------------

Water Penetration

Single	15psf (720 Pa) up to 98-7/16' (2500 mm)
Double	15psf (720 Pa) up to 94-1/2" (2400 mm)
Single and Double	12psf (575 Pa) up to 119" (3023 mm)

AAMA Rating

Single	AW-PG 70
Double 10' Tall	AW-PG 60
Single and Double	CW-PG 40

Hardware

Exposed Barrel Hinge

Accessories

Door Closer, 10" Bottom Rail

Easy Access Threshold

13/16" (20 mm) buried threshold & ADA compliant. Install gutter drain in front of it for best performance

Thermal Example*

Glass U-Value	Spacer Type	Overall U-Value
0.29	Aluminum	0.38
0.29	TGI-M warm edge	0.36
0.24	TGI-M warm edge	0.33
0.16	TGI-M warm edge	0.29
0.10	TGI-M warm edge	0.25

*Information based on NFRC standard test size for terrace door (37-13/16" x 82-5/16" [960 X 2090 mm])

Note: Above mentioned information and data depending to specific system configurations.

Please find detailed information in our technical documentations or contact Bigfoot Door directly.